

CWE SERIES

DEFORESTATION SHEAR

PINZA DA DEFORESTAZIONE

TÊTE SÉCATEUR

BAUMSCHEREN

PINZA FORESTAL




- ◆ **REINFORCED FRAME**
TELAILO RINFORZATO
- ◆ **REINFORCED BOLTED BLADE**
FISSAGGIO LAMA RINFORZATO
- ◆ **PRECISE AND CLEAN CUT**
TAGLIO PRECISO E PULITO
- ◆ **OPTIONAL COLLECTOR ARM AND ROTATION**
BRACCETTO RACCOLTORE E ROTAZIONE
OPZIONALI

The CWE tree shear is designed for excavators from 5 to 11 tons. Its compact design and light weight make it ideal for safely cutting trees and bushes along riverbanks, near crops, or in forested areas.

La pinza forestale CWE è progettata per escavatori da 5 a 11 tonnellate. Il suo design compatto e il peso ridotto la rendono ideale per tagliare alberi e cespugli in sicurezza lungo le rive dei fiumi, vicino alle colture o nelle aree boschive.

- **Compact frame** - Telaio compatto
- **Optional collector arm and rotation** - Rotazione e braccetto opzionali

CWE series	CW - 250E	
EXCAVATOR WEIGHT	ton.	05 - 11
Ø max. SOFT WOOD	mm	250
Ø max. HARD WOOD	mm	180
LOADING CAPACITY	Kg	250
A	mm	930
B	mm	700
C	mm	490
D	mm	765
F2	ton.	22
SHEAR WEIGHT	Kg	235
EXCAVATOR WORKING PRESSURE	bar	250
EXCAVATOR OIL FLOW	l/min	60 - 100
EXCAVATOR CONNECTION PLATE	Kg	45
SKID-STEER CONNECTION PLATE	Kg	34
HYDRAULIC ROTATION KIT WEIGHT	Kg	48
ROTATION WORKING PRESSURE	bar	230
ROTATION OIL FLOW	l/min	50
COLLECTOR ARM	Kg	72
COLLECTOR ARM WORKING PRESSURE	bar	200
COLLECTOR ARM OIL FLOW	l/min	15
FELLING SUPPORT	Kg	14

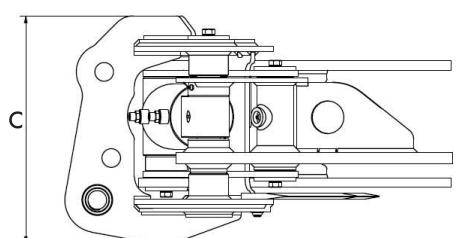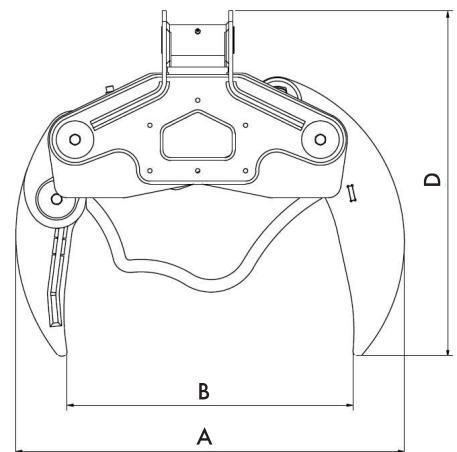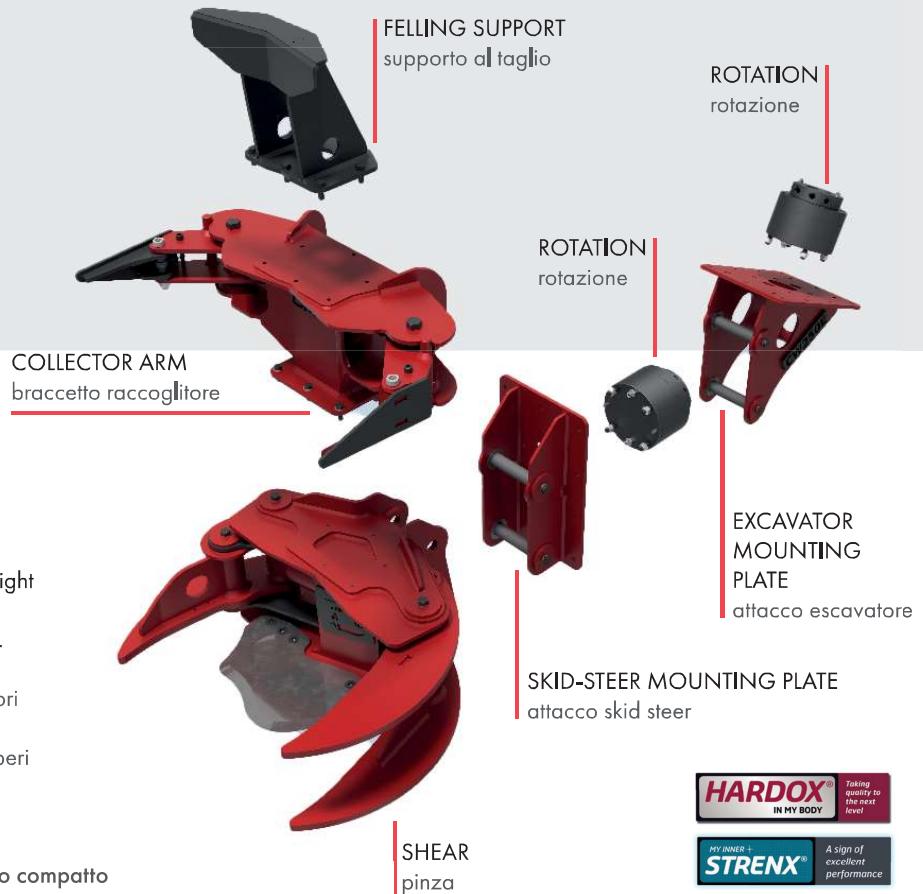

Attachment-excavator couplings data are for information only, always check load diagram of the machine.

I dati relativi agli accoppiamenti attrezzatura escavatore sono da considerarsi puramente indicativi, controllare sempre i diagrammi di carico della macchina operatrice.

